

PDUX2B (48V) Datasheet



The PDUX2B (48V) is a high-performance solid state power distribution unit with a total of 16 powered output channels and maximum current capacity of 160A.

This includes 4 flexible 20A output drivers which may be configured as half bridge, high side, high side PWM (100Hz-20kHz), with the ability to soft start electrical loads with closed loop current limitation and two 20A high side capable output drivers, with the ability to soft start electrical loads.

In addition, eight 10A capable output drives, high side and high side PWM (100Hz-20kHz) with the ability to soft start electrical loads and two 10A high side capable output drivers, with the ability to soft start electrical loads.

Using digitised, voltage, or linearised values from its 12 analogue inputs and from any of 3 CAN buses the PDUX2B is calibrated using a clear graphical interface with full logic simulation ability and live monitoring.

The PDUX2B is able to operate in a low power standby state, drawing <math><2\text{mA}</math>, with configurable activation based on physical or CAN input.

Additionally, the PDUX2B may be used to expand input and output functionality of any Life Racing ECU.

The PDUX2B is available as 12V, 24V and 48V variants as well as an internal IMU option.

LIN bus support for Bosch WDA wiper and Pierburg CWA400 pump devices.

Features:

- Schematic based calibration including logic simulation tool
- Custom CAN across 3 buses including mux frames and retransmission (gateway) features, configured with the help of a graphical display and import/export tool
- Low power state woken on physical input, CAN activity, or specific CAN frame
- Configurable evaluation frequency operation of schematic components in circuitry – “Expert Frequency Mode”
- Optional internal IMU (Inertial Measurement Unit) feature offers a six-axis gyro and accelerometer which can be processed internally or transmitted over CAN.

Outputs:

- 16 main Power Outputs
 - 4 multifunction high side, low side, high side PWM (100Hz-20kHz) outputs (20A continuous, soft-start inrush limiting 50A, hard-start inrush 50A)
 - 2 high side outputs (20A continuous, hard-start inrush 50A)
 - 8 high side, high side PWM (100Hz-20kHz) outputs (10A continuous, hard-start inrush 20A)
 - 2 high side outputs (10A continuous, hard-start inrush 20A)
- Output linking (‘teaming’) to support very high current devices
- All high-side outputs are capacitive load starting sequence capable
- 2 additional low side outputs with configurable PWM (10Hz-10kHz, 5A maximum)
- All outputs short circuit and thermally protected with multi-stage in-rush control
- All outputs additionally protected by physical fuses as required by worldwide regulations
- Combined diagnostic output with reset input
- 128 scalable CAN (‘soft’) outputs
- Custom datastream (CAN) – i.e. customisable channel current, channel state and device information

Inputs:

- 12 physical 0-5V inputs, including software selectable 3k ohm pull-up resistors
- 4x inputs capable of programmable “wake” functionality
- Comparing and manipulating real numbers (floating point decimal) in schematic
- Analogue inputs can be linearised, viewed as raw voltage or Boolean value
- Dedicated wake pin
- 128 CAN ‘soft’ inputs with configurable scaling

Interfaces:

- 2x 100Mbit/s full duplex Ethernet (can be used as Ethernet switch)
- 3x CAN 2.0B – fully flexible
- Option for galvanically isolated CAN bus (CAN3 - custom projects only)
- RS232C serial interface (custom projects only)
- LIN Bus – current support for Bosch WDA wiper and Pierburg CWA400 pump devices

Power Supply:

- 6V to 20V input voltage (12V option), 6V to 30V input voltage (24V option), 6V to 60V (48V option)
- Dedicated logic power input
- 200mA regulated 5V sensor reference supply output with full circuit protection.

Sleep State:

- Low power standby state with configurable wake options:
 - Wake by voltage signal (1.6mA)
 - Wake by any CAN activity (CAN1 only) (2mA)
 - Wake by specific CAN frame (two frames required, CAN1 only) (2mA)
 - Wake by CAN specific CAN frame with low latency (one frame required, CAN1 only) (10mA)

ECU Slaving:

- Allows a Life Racing ECU to “claim” unused pins across a dedicated CAN bus utilising the following PDU I/O:
- Outputs 1-4 with additional functionality including H-Bridge pairing and configurable PWM frequencies
- Low Outputs 5&6 with configurable PWM frequencies
- All 12 inputs, including eight frequency capable, and all with software selectable 3k Ohm pull-up resistors
- Slaved frequency Inputs 1-4 can be modified for active 2 wire sensors found in OEM applications (See ordering Information)

Physical:

- 1 Leavysal connector with a total of 62 pins
- Amphenol SurLok Power Stud
- Machined Aluminium enclosure
- Meets IP 67 standard
- 145x175x50mm (including connectors)
- 750 grams
- Operating Temperature -40C to +85C
- M4 mounting threads.

Ordering Information:

Description	Part number
PDUX2B 48V	PDU-F06
PDUX2B Connector Kit	CON-B11
3-axis accelerometer and 3-axis gyroscope	PDU-FEAT-IMU
Required for active 2 wire sensors found in OEM applications	PDU-BTC-WS

Wiring Information:

Power Stud

Mating connector: Surlok SLPPBxxBSR
(xx=size: 35 150A, 50 200A)

Pin	Gauge	Signal Name	Signal Notes
1	-	+12V Supply	Positive battery supply

Connector 1

Mating Connector: TE 1-1418883-1, Hood TE 1418882-1

Pin	Gauge	Signal Name	Signal Notes
1	24-16AWG	5V OUT	Regulated 5V sensor reference supply
2	24-16AWG	INPUT #12	Analogue 0-5V, 3k Ω programmable pullup to 5V, Wake ⁽¹⁾
3	24-16AWG	INPUT #11	Analogue 0-5V, 3k Ω programmable pullup to 5V, Wake ⁽¹⁾
4	24-16AWG	INPUT #10	Analogue 0-5V, 3k Ω programmable pullup to 5V, Wake ⁽¹⁾
5	24-16AWG	INPUT #09	Analogue 0-5V, 3k Ω programmable pullup to 5V, Wake ⁽¹⁾
6	24-16AWG	INPUT #08	Analogue 0-5V, 3k Ω programmable pullup to 5V SLAVED: Analogue or frequency; 0-5V, 3k Ω programmable pullup to 5V Fixed frequency voltage thresholds at 1.25 and 3.75V
7	24-16AWG	INPUT #07	Analogue 0-5V, 3k Ω programmable pullup to 5V SLAVED: Analogue or frequency; 0-5V, 3k Ω programmable pullup to 5V Fixed frequency voltage thresholds at 1.25 and 3.75V
8	24-16AWG	INPUT #06	Analogue 0-5V, 3k Ω programmable pullup to 5V SLAVED: Analogue or frequency; 0-5V, 3k Ω programmable pullup to 5V Fixed frequency voltage thresholds at 1.25 and 3.75V
9	24-16AWG	INPUT #05	Analogue 0-5V, 3k Ω programmable pullup to 5V SLAVED: Analogue or frequency; 0-5V, 3k Ω programmable pullup to 5V Fixed frequency voltage thresholds at 1.25 and 3.75V
10	24-16AWG	INPUT #04	Analogue 0-5V, 3k Ω programmable pullup to 5V SLAVED: Analogue or frequency; 0-5V, -5V to +5V, 3k Ω programmable pullup to 5V, configurable frequency voltage thresholds. *PDU-BTC-WS required for active 2 wire sensors found in OEM applications
11	24-16AWG	INPUT #03	Analogue 0-5V, 3k Ω programmable pullup to 5V SLAVED: Analogue or frequency; 0-5V, -5V to +5V, 3k Ω programmable pullup to 5V, configurable frequency voltage thresholds. *PDU-BTC-WS required for active 2 wire sensors found in OEM applications
12	24-16AWG	INPUT #02	Analogue 0-5V, 3k Ω programmable pullup to 5V SLAVED: Analogue or frequency; 0-5V, -5V to +5V, 3k Ω programmable pullup to 5V, configurable frequency voltage thresholds. *PDU-BTC-WS required for active 2 wire sensors found in OEM applications
13	24-16AWG	INPUT #01	Analogue 0-5V, 3k Ω programmable pullup to 5V SLAVED: Analogue or frequency; 0-5V, -5V to +5V, 3k Ω programmable pullup to 5V, configurable frequency voltage thresholds. *PDU-BTC-WS required for active 2 wire sensors found in OEM applications
14	24-16AWG	SENSOR GND	Protected sensor ground
15	-	DO NOT CONNECT	LR Internal use only
16	24-16AWG	LIN	Bosch WDA and Pierburg CWA400 support via OEM schematic components
17	24-16AWG	RS232 TX	RS232 transmit
18	24-16AWG	RS232 RX	RS232 receive
19	24-16AWG	CAN #03 LO	CAN communication port 120 Ω software selectable termination
20	24-16AWG	CAN #03 HI	CAN communication port 120 Ω software selectable termination
21	24-16AWG	CAN #02 LO	CAN communication port 120 Ω software selectable termination
22	24-16AWG	CAN #02 HI	CAN communication port 120 Ω software selectable termination
23	24-16AWG	CAN #01 LO	CAN communication port 120 Ω software selectable termination
24	24-16AWG	CAN #01 HI	CAN communication port 120 Ω software selectable termination

Pin	Gauge	Signal Name	Signal Notes
25	-	DO NOT CONNECT	LR Internal use only
26	-	DO NOT CONNECT	LR Internal use only
27	24-16AWG	ETHERNET2 TX-	Ethernet communication port 2
28	24-16AWG	ETHERNET2 TX+	Ethernet communication port 2
29	24-16AWG	ETHERNET2 RX-	Ethernet communication port 2
30	24-16AWG	ETHERNET2 RX+	Ethernet communication port 2
31	24-16AWG	ETHERNET1 TX-	Ethernet communication port 1
32	24-16AWG	ETHERNET1 TX+	Ethernet communication port 1
33	24-16AWG	ETHERNET1 RX-	Ethernet communication port 1
34	24-16AWG	ETHERNET1 RX+	Ethernet communication port 1
35	-	DO NOT CONNECT	LR Internal use only
36	-	DO NOT CONNECT	LR Internal use only
37	24-16AWG	WAKEUP	Dedicated Wake ⁽¹⁾
38	24-16AWG	LOGIC POWER IN	+12V Battery supply; recommended independent logic supply <0.5A
39	24-16AWG	Low Output 06	Low Side, Low Side PWM (Configurable Hz, 5A maximum) ⁽³⁾ SLAVED: Low Side PWM variable frequency
40	24-16AWG	Low Output 05	Low Side, Low Side PWM (Configurable Hz , 5A maximum) ⁽³⁾ SLAVED: Low Side PWM variable frequency
41	24-16AWG	WARNING AND RESET SW	Warning output for an LED to ground. Short to ground for manual reset.
42	24-16AWG	Output 16D	High Side with Diode intended for wiper operation 15A
43	24-16AWG	Output 16	High Side 10A
44	24-16AWG	Output 15	High Side 10A
45	24-16AWG	Output 14	High Side/High Side PWM (Configurable Hz), Soft start, 10A
46	24-16AWG	Output 13	High Side/High Side PWM (Configurable Hz), Soft start, 10A
47	24-16AWG	Output 12	High Side/High Side PWM (Configurable Hz), Soft start, 10A
48	24-16AWG	Output 11	High Side/High Side PWM (Configurable Hz), Soft start, 10A
49	24-16AWG	Output 10	High Side/High Side PWM (Configurable Hz), Soft start, 10A
50	24-16AWG	Output 9	High Side/High Side PWM (Configurable Hz), Soft start, 10A
51	24-16AWG	Output 8	High Side/High Side PWM (Configurable Hz), Soft start, 10A
52	24-16AWG	Output 7	High Side/High Side PWM (Configurable Hz), Soft start, 10A
53	24-16AWG	Power Ground	Negative battery supply. Must be connected
54	24-16AWG	Power Ground	Negative battery supply. Must be connected
55	24-16AWG	Power Ground	Negative battery supply. Must be connected
56	24-16AWG	Power Ground	Negative battery supply. Must be connected
57	22-14AWG	Output 6	High Side, 20A ⁽²⁾
58	22-14AWG	Output 5	High Side, 20A ⁽²⁾
59	22-14AWG	Output 4	High Side/Low Side/High Side PWM (Configurable Hz), Soft start, 20A ⁽²⁾ SLAVED: Half Bridge, Full Bridge paired with Output 3, Low Side, Variable frequency PWM
60	22-14AWG	Output 3	High Side/Low Side/High Side PWM (Configurable Hz), Soft start, 20A ⁽²⁾ SLAVED: Half Bridge, Full Bridge paired with Output 4, Low Side, Variable frequency PWM
61	22-14AWG	Output 2	High Side/Low Side/High Side PWM (100Hz-20kHz), Soft start, 20A ⁽²⁾ SLAVED: Half Bridge, Full Bridge paired with Output 1, Low Side, Variable frequency PWM
62	22-14AWG	Output 1	High Side/Low Side/High Side PWM (100Hz-20kHz), Soft start, 20A ⁽²⁾ SLAVED: Half Bridge, Full Bridge paired with Output 2, Low Side, Variable frequency PWM


Footnotes:

⁽¹⁾Can be calibrated to bring unit out of sleep mode when driven high.

⁽²⁾ Default PWM frequency for Outputs 1-4 is 20kHz.

⁽³⁾ Default PWM frequency for Low-Side Outputs 5-6 is 125Hz.

Dimensions:

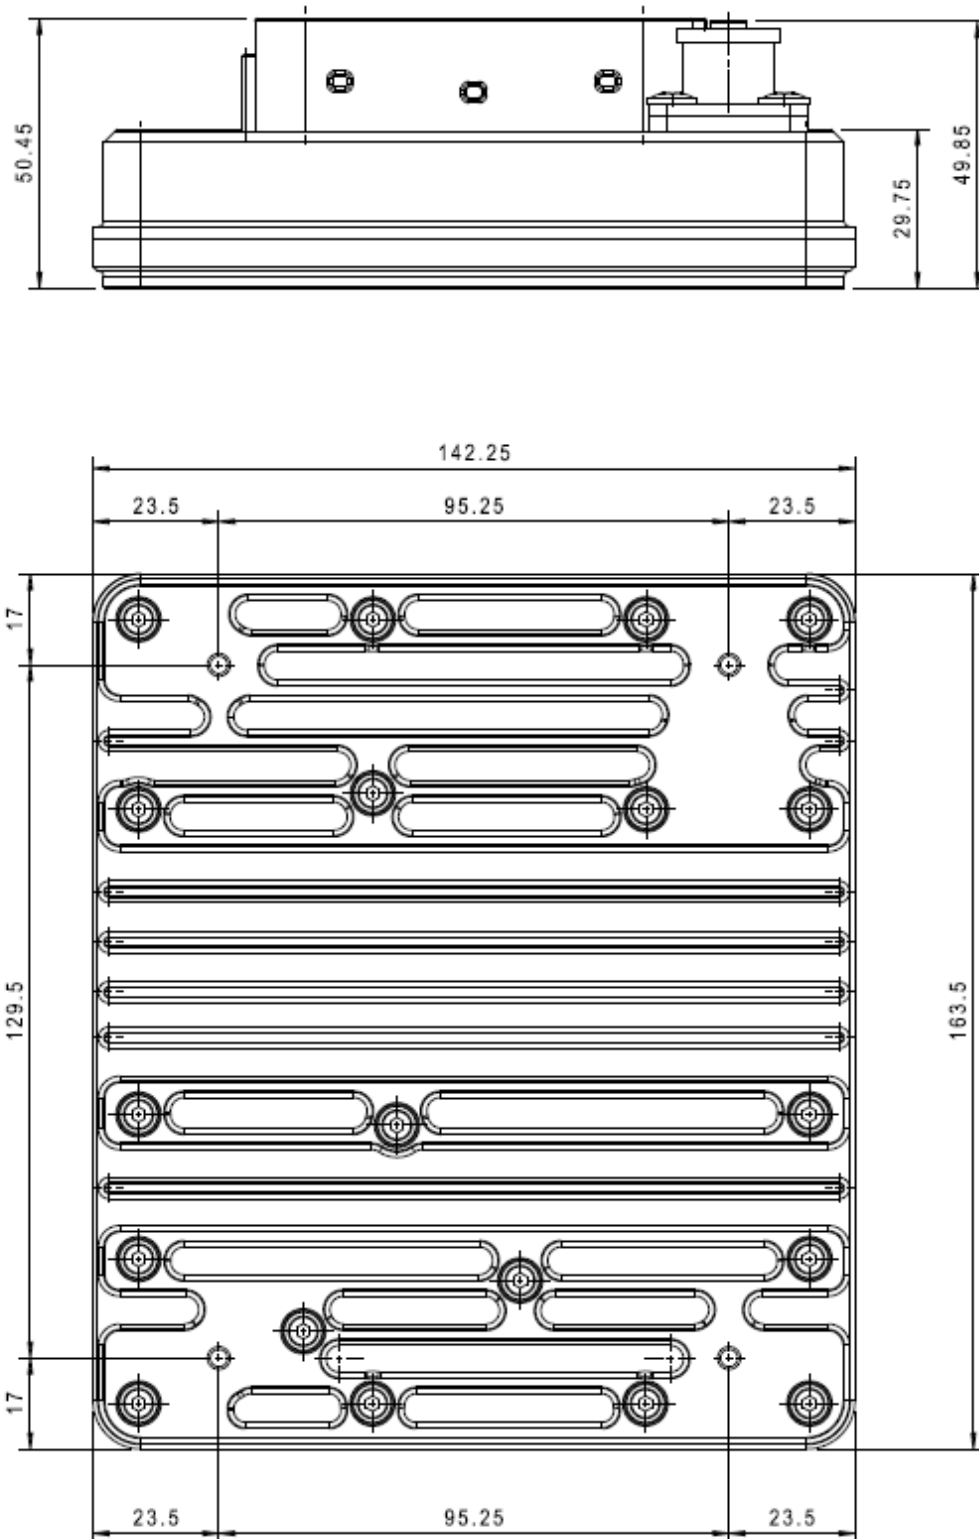

Warranty and Servicing:

- 1-year limited warranty when used within supplied specification.